

SUPER WRAP LAG GECO - DRUM LAGGING FOR CORRUGATORS

Characteristics and technical data



SUPER WRAP LAG GECO

Drum lagging for corrugators

CHARACTERISTICS

- Further development of our SUPER GRIP drum lagging
- Consists of high-strength PES fabrics
- Universal use for most drum dimensions
- High temperature and chemical resistance
- High coefficient of friction

SPECIAL FEATURE


- Self adhesive layer
 - » no use of additional glue
 - » quick and easy installation
- 3 layers:
 - » silicone coating
 - » fabric
 - » self adhesive layer

TECHNICAL DATA

- Material: 100 % synthetic, silicone, adhesion layer
- Thickness: 7.3 mm | 0.287"
- Temperature Resistance: up to 260 °C | 500 °F



belt side

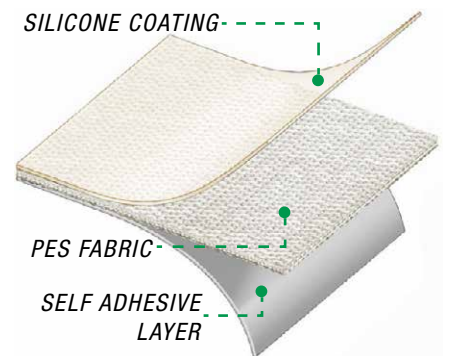

drum side

ADVANTAGES

- High-strength adhesion
- Coefficient of friction remains constant throughout the entire lifetime
- Emergency running properties
- 50% time saving during installation compared to a conventional installation
- No dangerous substances